


10012 REINFORCED PVC WATER SUCTION AND DISCHARGE

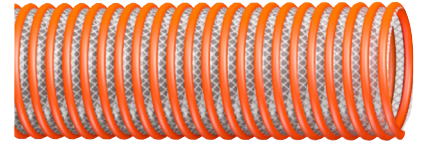

This medium-duty water suction and discharge hose is designed for use in construction, dewatering, agricultural and industrial applications. PVC tube is reinforced with spiraled synthetic textile and orange PVC Helix. PVC tube is designed to handle residual chemicals in water transfer applications.

TUBE:	Clear PVC
REINFORCEMENT:	Spiral Textile With Orange PVC Helix
TEMPERATURE:	-13°F to 140°F

PART #	ID			OD			WP		BEND RADIUS		VACUUM PRESSURE	WEIGHT		PACKAGING (ft)
	Fraction (in)	Decimal (in)	Metric (mm)	Fraction (in)	Decimal (in)	Metric (mm)	PSI	Bar	Decimal (in)	Metric (mm)	inHg	(lb/ft)	(kg/m)	
10012-150	1 1/2	1.50	38	2 2/64	2.03	52	110	8	3	64	29	0.47	0.70	100
10012-200	2	2.00	51	2 38/64	2.60	66	100	7	4	102	29	0.69	1.03	100
10012-250	2 1/2	2.50	64	3 1/64	3.01	76	100	7	4	102	29	0.69	1.03	20, 100
10012-300	3	3.00	76	3 45/64	3.70	94	100	7	6	152	28	1.13	1.68	20, 100
10012-400	4	4.00	102	4 50/64	4.78	121	80	6	7	178	28	1.74	2.59	20, 100
10012-600	6	6.00	152	7 11/64	7.17	182	70	5	10	254	28	3.88	5.77	20, 100
10012-800	8	8.00	203	9 22/64	9.34	237	60	4	16	406	28	5.55	8.26	20, 60
10012-1000	10	10.00	254	11 40/64	11.63	295	40	3	25	635	28	8.90	13.24	20, 60
10012-1200	12	12.00	305	13 51/64	13.80	351	28	2	45	1143	25	10.30	15.33	20, 60